



Built for road performance.

Mobile Series: Full HD 1080p HDCVI mobile surveillance cameras in 2.0MP

Keep every angle of your vehicle covered with Mobile Series surveillance cameras from Securview. Choose from vandal dome, compact bullet & bumper cameras, capable of Full HD streaming in durable IP67 rated housings.

- Stream 2.0MP / Full HD 1080p (1920 x 1080) 25fps
- Fixed 2.8mm lens for wide viewing angles
- Smart infrared illumination, up to 20m range
- IP67 weather resistant metal housings (all models)
- Shock resistant housings with aviation connectors
- DIRAT dome: Smaller than a tennis ball Ø62 x 62mm
- CIRAT camera: Ideal for bumper placement
- BT camera: Ideal for flush mount in-bumper






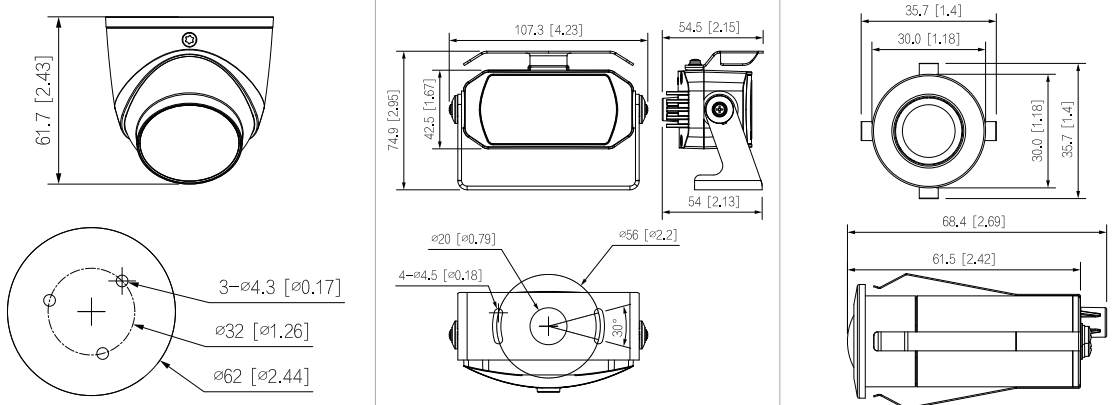
Built-in Mic & 20m Infrared



Compact Bullet for In-Bumper



IP67 Rated Across the Range

Model		VSCVIM-2DIR	VSCVIM-2CIR	VSCVIM-2BT	
General	Product Image				
	Camera Style	Mobile Dome Camera	Mobile Bumper Camera	Mobile Bullet Camera	
	Image Sensor	1/2.7" 2.0 Megapixel CMOS			
	Effective Pixels	1920 (H) x 1080 (V)			
	Signal Noise Ratio	> 65dB			
Camera	Lens	2.8mm F2.0 Fixed Lens			
	Angle of View	101° (H), 54° (V), 119° (D)	106° (H), 55° (V), 126° (D)	117° (H), 63° (V), 135° (D)	
	Focus	Fixed / 0.5m Min. Focus Distance			
	Minimum Illumination	0.02 Lux at F2.0 (Colour) / 0 Lux IR Active		0.02 Lux at F2.0 (Colour)	
	Electronic Shutter	1/25 ~ 1/100,000s			
	Day/Night	Auto (ICR) / Manual			
	Infrared Range	20m		N/A	
	White Balance	Auto / Manual			
	Noise Reduction	2D			
	Gain Control	Auto			
	Lighting Compensation	BLC / HLC / DWDR			
	Video	Resolution	1080p (1920 x 1080) to CIF (352 x 288)		
		Frame Rate	25fps (1080p and lower)		
Transmission Distance		3m / 6m / 12m / 18m heavy duty cables available			
DORI	Distance	Detect	38.6m	40m	
		Observe	15.4m	16m	
		Recognise	7.7m	8m	
		Identify	3.9m	4m	
Interface	Audio Input	Built-in microphone		N/A	
	Alarm Interface	N/A			
	Video Output	1 x BNC HDCVI/CVBS/AHD/TVI switchable video output (aviation connector)			
	OSD Menu	Support			
Environmental	Ingress Protection	IP67			
	Vandal Resistant	N/A			
	Housing	Metal			
	Power Input	12VDC			
	Power Consumption	<2.3W		<1.1W	
	Dimensions	Ø62 x 62mm	107 x 75 x 55mm	Ø36 x 68mm	
	Weight	0.17kg	0.31kg	0.07kg	
Operating Environment	-40° to 60°C / RH90% (max)				
Accessories	Product Diagram				

Your local Securview™ HDCVI solutions professional:

www.activeonline.com.au 1300 816 742