




Active Online

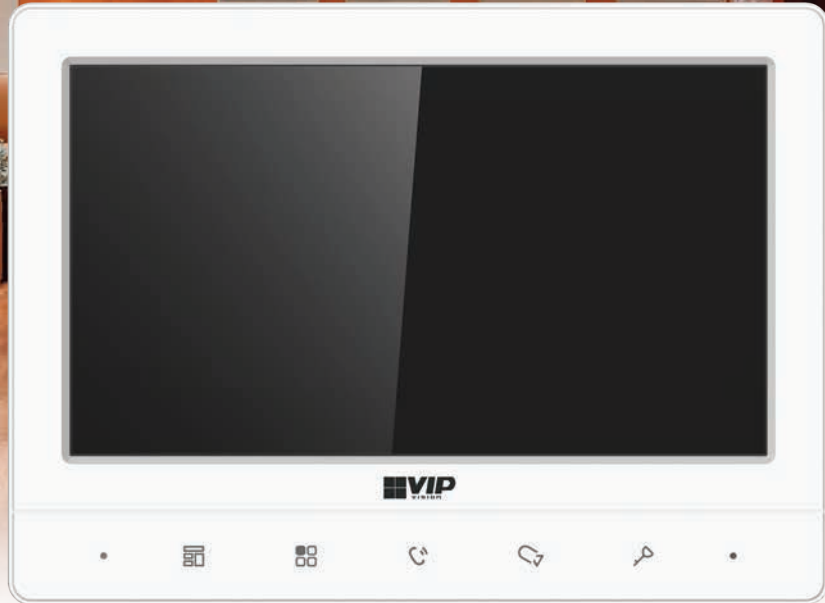


# Intercom upgrades made easy.

## Entry Series: Standalone analogue upgrades for existing intercom systems

The Entry Series Intercom Kit is a standalone analogue intercom system, ideal for upgrading older intercom systems wired with 4/6-core alarm cable. Experience modern intercom features such as video & two-way talk in one convenient, entry-level package.

- Analogue door station with 1.3 megapixel camera
- Slim 7" touchscreen indoor intercom monitor
- Single button door station for visitor ease-of-use
- Door stations call connected indoor monitors (max. 3)
- Live view any connected door station or camera
- Interface with most electronic door strikes & sensors
- Ideal for replacing old analogue intercom systems
- Add an analogue camera for live view (*not included*)




Entry Level Analogue Intercom


Live View with Analogue Camera

Two-way Talk & Door/Gate Unlock

## Door Stations | Specifications

Model	INTIPDS-A1
Product Image	
<b>General</b>	
Main Processor	Embedded Microprocessor
Camera System	1.3 Megapixel CMOS (Horizontal: 70°, Vertical: 40°)
Low-Light Application	N/A
Card Support	N/A
Keypad	1 Mechanical Button
Tamper Detection	N/A
Input / Output	1 x Exit Button / 1 x Door Status Detection
Audio / 2-Way Talk	Omni-directional Microphone & Embedded Loudspeaker for 2-way Talk
Internal MicroSD Slot	N/A
Communication Mode	Analogue
<b>Environmental</b>	
Vandal Resistant	N/A
Ingress Protection	IP66
Construction	PC + ABS
Installation Options	Surface Mount (Includes Rain Cover)
Power Input / Use	12VDC (Powered by Monitor), Standby < 1W / Operation < 3W
Weight / Dimensions	0.18kg / 132 x 46 x 39mm


## Intercom Monitor | Specifications

Model	INTIPMON-A1
Product Image	
<b>Intercom Monitor</b>	
Main Processor	Embedded Microprocessor
Audio / 2-Way Talk	Omni-directional Microphone & Embedded Loudspeaker for 2-way Talk
Display Size	7" Colour TFT LCD (1024 x 600) Capacitive Touchscreen
Controls	Hang up / Menu options / Call / Live view / Unlock door
Alarm Support	N/A
Internal Capacity	N/A
Communication Mode	Analogue
<b>General</b>	
Construction	PC + ABS
Installation Options	Surface Mount (Bracket Included)
Operating Temperature	-10 ~ +55°C / 10 ~ 95%RH (max.)
Power Input / Use	12VDC / Standby < 2W, Operation < 5W
Weight / Dimensions	0.25kg / 183 x 134 x 18mm

## Example Installation | System Map

### Legend

-  Analogue Video (CVBS)
-  4-Core Alarm Cable
-  Power

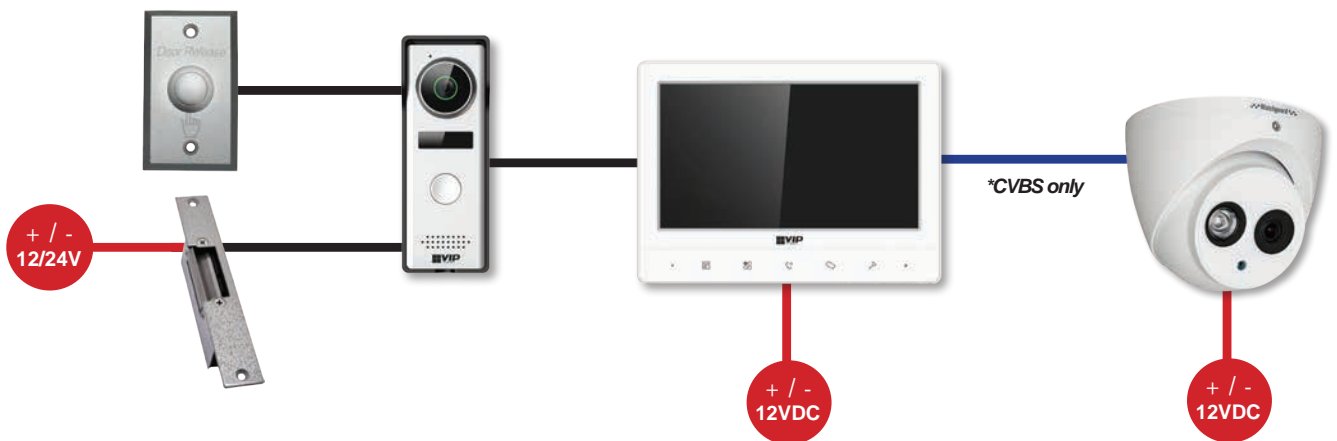

Your local VIP Vision™ intercom solutions professional:

[www.activeonline.com.au](http://www.activeonline.com.au) 1300 816 742