



Professional access solutions.

Watchguard™ MAGLOC Series: Electromagnetic door locks and accessories

The Watchguard™ MAGLOC Series comprises affordable access control solutions, with a wide range of electromagnetic locks and accessories to safely and securely control access in your home or business. Select and customise from in-swing, out-swing and sliding electromagnetic locks with options for open/close supervision. The MAGLOC Series is available in indoor or outdoor, weather-resistant models.

- Models for surface or side mount & mortise installs
- 12VDC or 24VDC selectable input voltage
- Holding force of 270kg across the range
- Fail-safe configuration for all MAGLOC models
- 0~90s door timer model available (-DST, option)
- Door status sensor for open/close supervision (option)
- Built-in voltage spike suppression across the range
- Anodised aluminium or stainless steel construction
- Wide range of accessories to support installations
- Locks include mounting kits, bolts, washers, etc.



270kg

Up to 270kg Holding Force




12/24VDC

Dual Voltage Compatible



Wide Range of Accessories

Model	MAGLOC100S	MAGLOC100S-DST	MAGLOC100M	MAGLOC200S	MAGLOC200G
Image					
Type	Surface Mount	Surface Mount	Mortise Mount	Surface Mount	Side Mount
Holding Force	270kg				
Timer	No	0~90 seconds	No	No	No
Lock Configuration	Fail Safe				
Lock Status Sensor	No	Yes	No	Yes	Yes
Power Input	12VDC / 24VDC (selectable)				
Current Draw	500mA@12V / 250mA@24V				
Overvoltage Protection	Yes				
Indoor/Outdoor	Indoor Only			Indoors / Outdoors	
Construction	Anodised Aluminium with Zinc Finish			Stainless Steel with Zinc Finish	
Armature Dimensions	185 x 38 x 12.5mm	185 x 38 x 12.5mm	185 x 38 x 12.5mm	185 x 38 x 12.5mm	185 x 38 x 12.5mm
Lock Dimensions	250 x 47.2 x 26.5mm	250 x 42.2 x 26.5mm	228 x 38 x 27mm	203 x 40 x 44mm	203 x 38.5 x 44mm

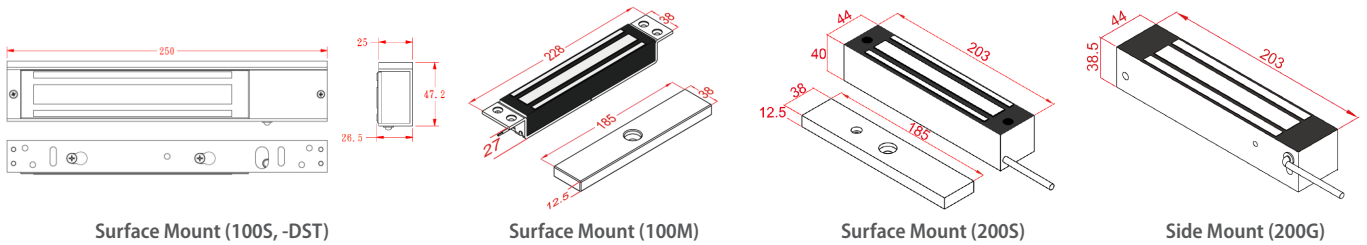

Model	MAGLOC-ABL	MAGLOC-ABS	MAGLOC-LB200	MAGLOC-AH200	MAGLOC-UB100	MAGLOC-LZ100	MAGLOC-LZ200
Image							
Type	Filler Bar		L Angle Bracket	Armature Housing	U bracket	L-Z Bracket	
Construction	Anodised Aluminium						
Door Type	Out-swing	Out-swing	Out-swing	In-swing / Out-swing	Glass door (9-15mm thick)	In-swing	In-swing / sliding
Dimensions	266 x 19 x 16mm	266 x 19 x 12.7mm	266 x 38 x 25mm	200 x 55 x 15mm	190 x 62 x 35mm	266 x 19 x 16mm	185 x 50 x 5 mm



Filler Bar (MAGLOC-ABS and MAGLOC-ABL)

L Bracket (MAGLOC-LB200)

Armature Plate Housing (MAGLOC-AH200)

U Bracket (MAGLOC-UB100)

L & Z bracket (MAGLOC-LZ100/200)

Your local Watchguard™ access control professional:

www.activeonline.com.au 1300 816 742