

# 4G Intercom System AN2106-12D

Aristel



## Benefits


- SIM card based intercom / telephone system.
- Answer calls with your phone anytime anywhere.
- Call in to open the door.
- Expand connections from Master Units to provide more entry points using Slave Units.



## Features

- Easy installation with no indoor station.
- Connect your Master Unit via 4G SIM.
- Calls up to 3 numbers (landline or mobile).
- Call in to open the door (1152 numbers).
- IP54 Rating

## System Configuration

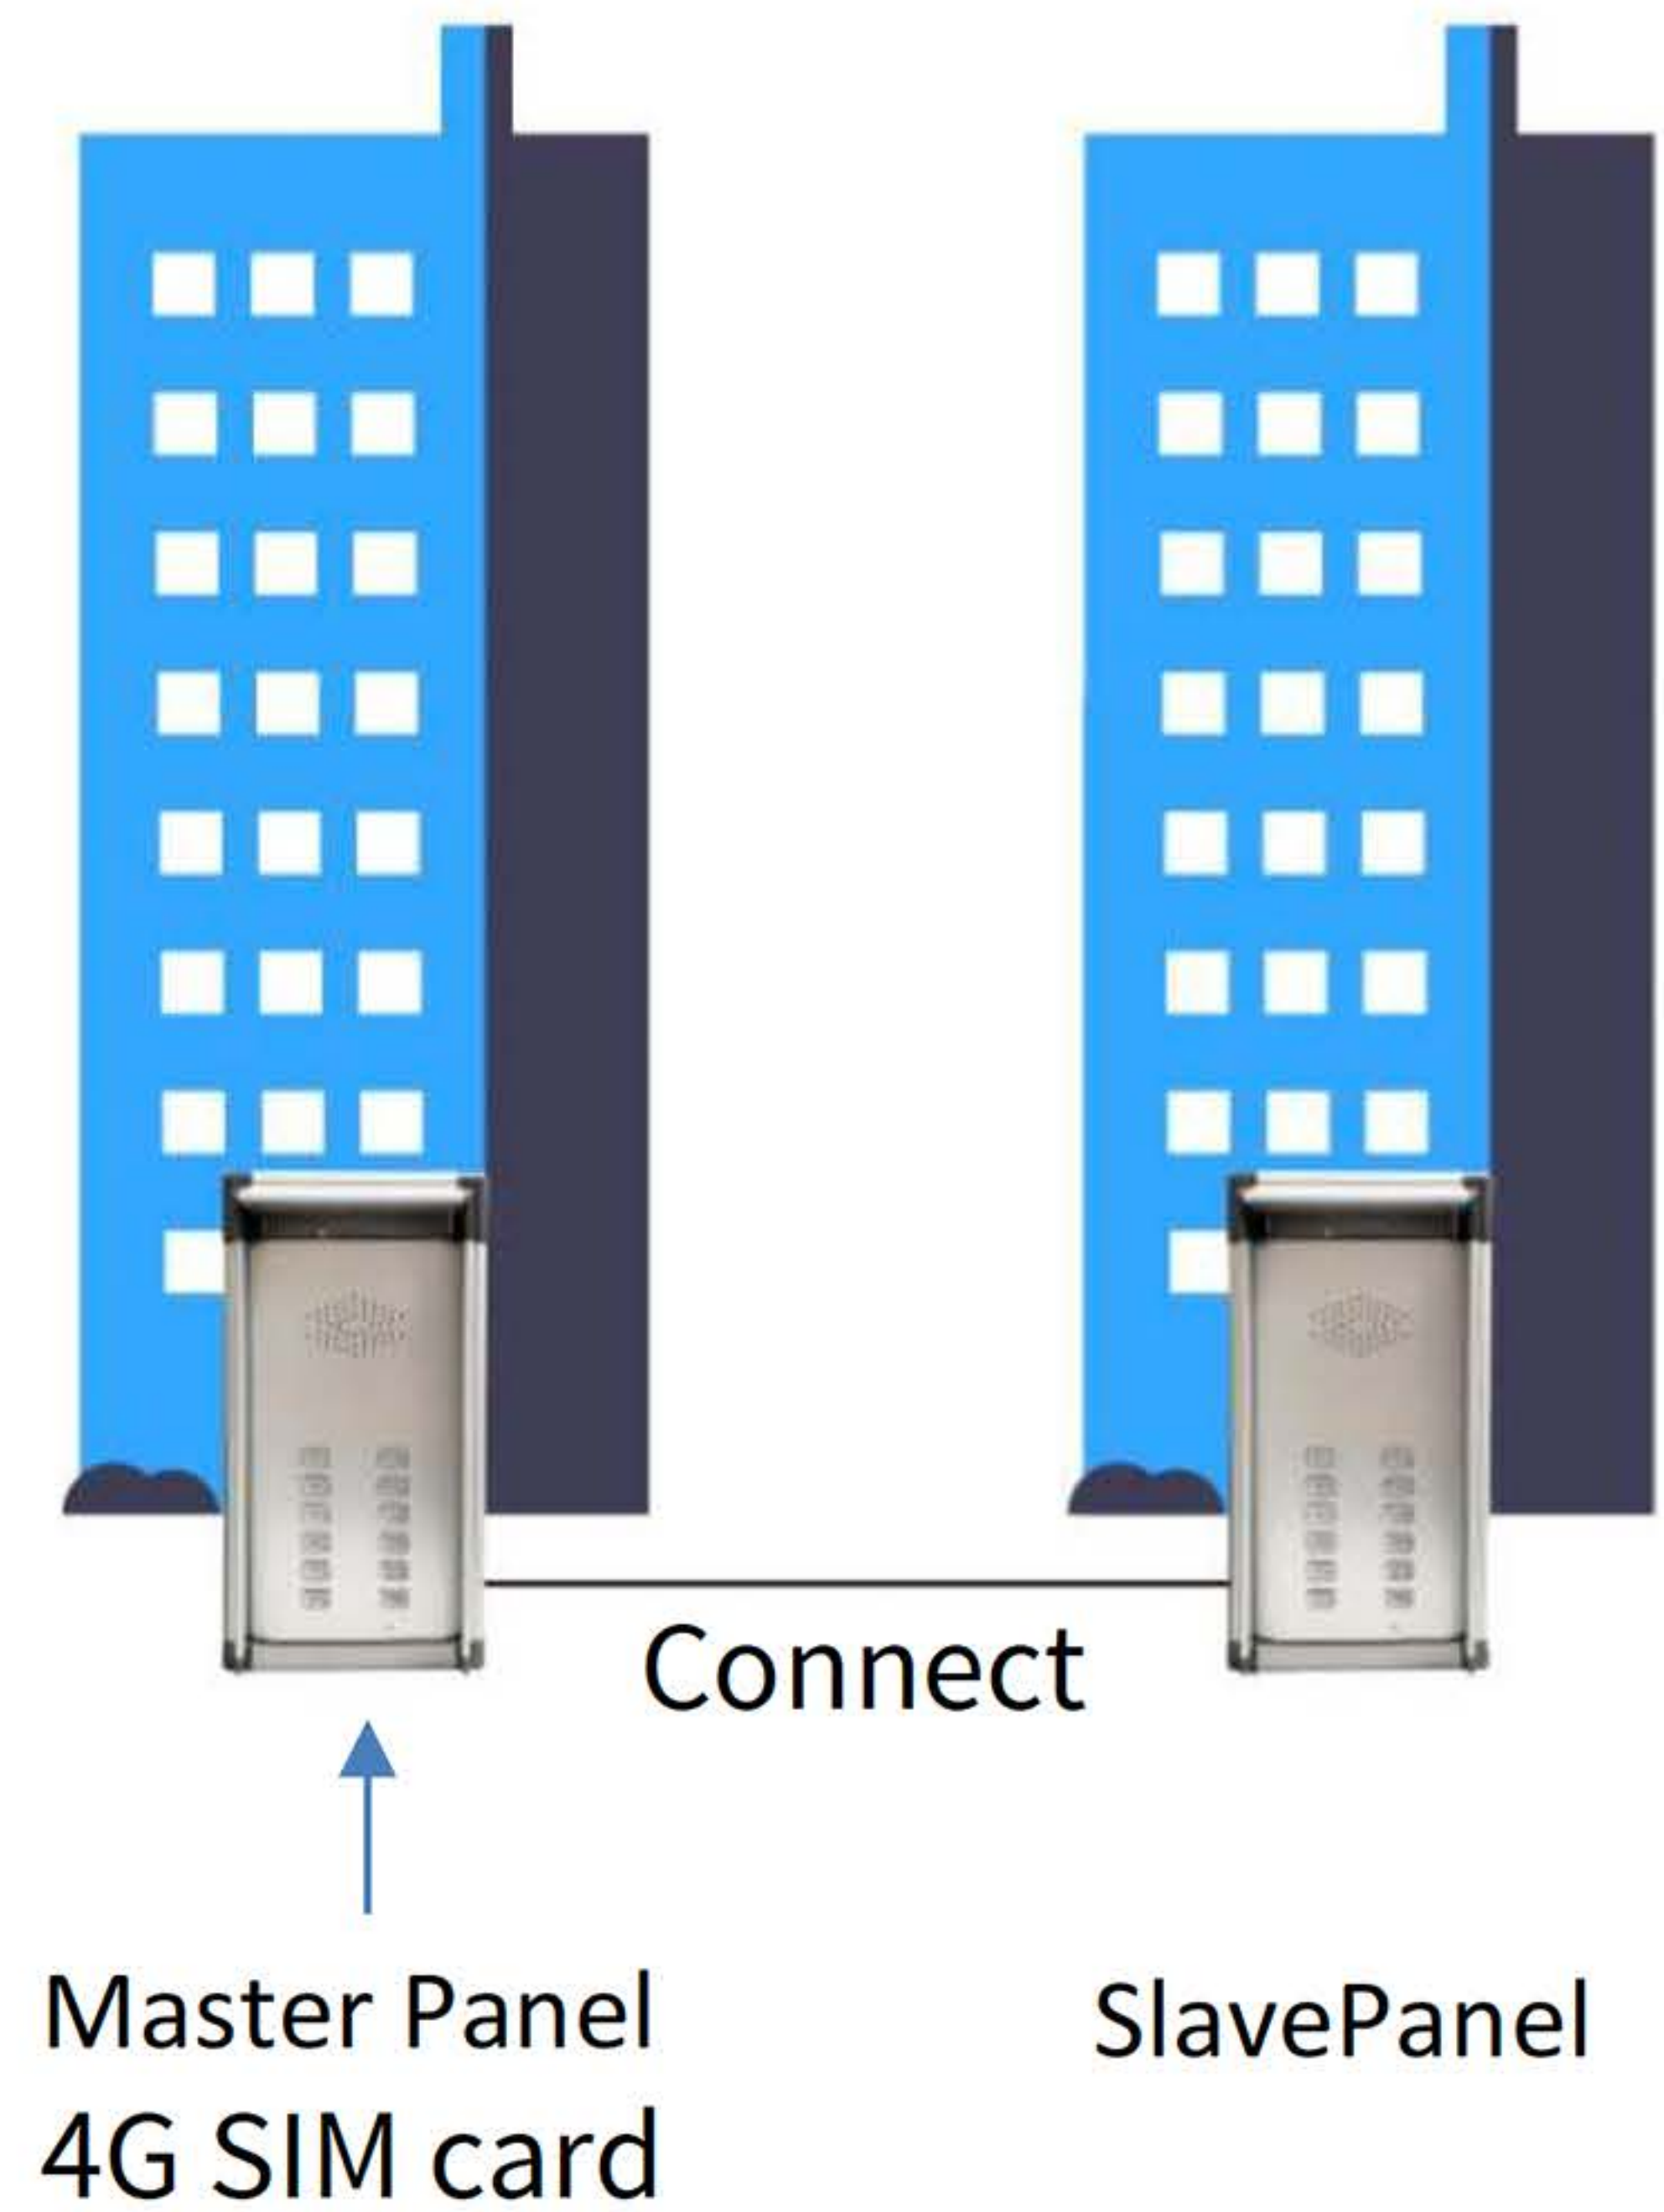

## Specification

|                                     |  |
|-------------------------------------|--|
| <b>Model</b>                        | <b>AN2106-12D 4G/3G Audio Keypad Intercom</b>  |
| <b>GSM / WCDMA / 4G Frequency</b>   | 2G / GSM 850/900/1800/1900 MHz,<br>3G / WCDMA 800/850/900/1900/2100 MHz<br>4G / LTE (EC) LTE FDD: B1/B3/B7/B8/B20/B28A<br>4G / LTE (A) LTE FDD: B2/B4/B12<br>4G / LTE (AU) LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28<br>LTE TDD: B40 |
| <b>Face plate of Intercom</b>       | 262 (H) x 138 (W) mm   |
| <b>Surface back box</b>             | 324 (H) x 177 (W) x 71(D) mm   |
| <b>Length of antenna</b>            | 3 meters cable   |
| <b>Power supply</b>                 | 12~24V AC/ DC  |
| <b>Design and material</b>          | Vandal resistant / die cast aluminum   |
| <b>Humidity</b>                     | Less than 80% RH   |
| <b>Operating Temperature</b>        | -20°C to 50°C  |
| <b>Operating Current</b>            | Maximum 250 mA, typically 55mA   |
| <b>In-wall back of (Rain cover)</b> | 308 (H) x 160 (W) x 45 (D) mm  |
| <b>In-wall backing (Box only)</b>   | 240 (H) x 125 (W) x 40 (D) mm (No rain cover)  |