

# ENSA™

Energy Saving Devices

## LOL-A16 LED OYSTER LIGHT



INSTRUCTION MANUAL

[www.ensalife.com](http://www.ensalife.com)



**Thank you for choosing the LOL-A16 LED Oyster Light.**

The ENSA LED oyster light features a robust weather and vandal resistant housing making it ideal for outdoor and indoor use. Available in cool and warm white colour temperatures, these oyster lights utilise the latest LED technology to provide evenly dispersed, low glare lighting with at least 75lm/W luminous efficacy and up to 30,000 hours rated lifespan.



**For installation by a qualified electrician only.**

### SPECIFICATIONS

AC Input Voltage	220 ~ 240VAC	Rated Load	16W (1200LM)
Power Frequency	50Hz	Working Conditions	-20 ~ 40°C / 93%RH (max.)

**INSTALLATION:** (see diagram)

- Ensure the power is disconnected.
- Rotate the plastic clockwise to open, screw off the screws on the lampshade to open.
- Insert wire through the holes provided and connect according to connect-wire diagram.
- Fix the metal bracket base on the ceiling through the holes on base pan with screws provided.
- Switch on the power to test.

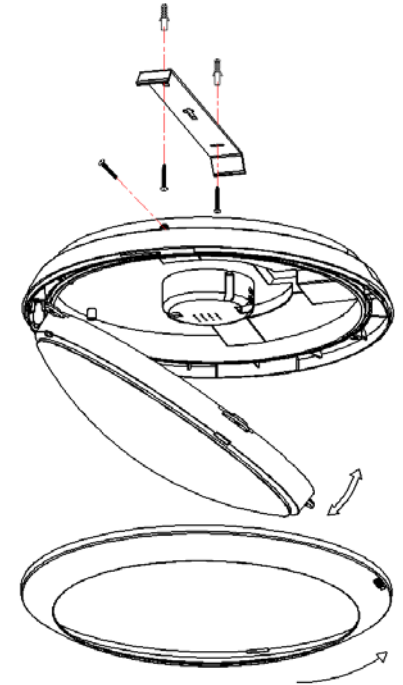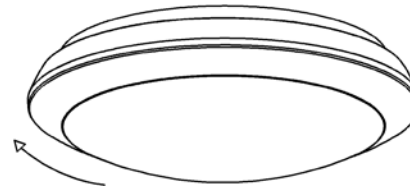

### CONNECTION-WIRE DIAGRAM:

Connecting the power source into the "N", "L" according to connection wire diagram when you install it.

