

Amazing images & value.

Compact Series: 6.0MP fixed lens IP surveillance kits in 4, 8 and 16 channels

The Watchguard™ fixed lens surveillance kits are high performance CCTV systems for an affordable price. Packed with high resolution Al turret domes & built-in PoE for easy installation, they are the ideal solution for homes & businesses.

- Records up to 6.0MP (3072 x 1728 pixels) at 20fps
- 50m infrared distance, true WDR & IP67 rated
- Tripwire, intrusion & face detection intelligent functions
- Al Perimeter Protection to identify people & vehicles
- Pre-fitted 1TB / 2TB / 4TB surveillance-grade HDDs
- Native Ultra HD live view on 4K monitors via HDMI
- Built-in Power over Ethernet (PoE) for easy installation
- Power via 12VDC or Power over Ethernet (802.3af)
- Backup video via external USB device or local network
- Remote view for iOS, Android & Windows smart device



Triple the resolution of Full HD



Built-in PoE for plug & play install




Remote view setup in seconds



Choose from three comprehensive, ready to install packages.

The Watchguard™ Compact Series offers complete 4 and 8 channel network surveillance packages, purpose-built for rapid installation and impressive results.

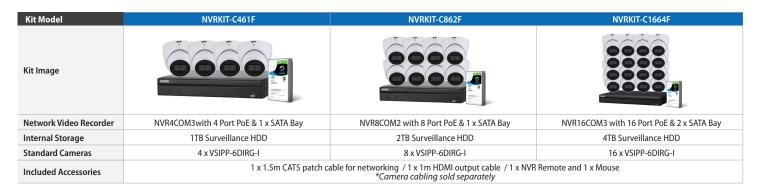

Kit Specifications

For full specifications and bracket compatibility, please see the individual web entry or datasheet.

NVR Model	NVR4COM3	NVR8COM2	NVR16COM3
Product Image			
Video Input	4 channel	8 channel	16 channel
Video Output	1 x HDMI , 1 x VGA		
Recording Resolution	Configurable from 8.0MP (3840 x 2160) to CIF (352 x 288)		
Incoming Bandwidth	80Mbps		128Mbps
Video Compression	H.265+ / H.265 H.264+ / H.264	H.265 / H.264	H.265+ / H.265 H.264+ / H.264
Bit Rate	N/A	16 ~ 20Mbps per channel	N/A
Ethernet	1 x RJ-45 port (10/100Mbps)		1 x RJ-45 port (10/100/1000Mbps)
PoE	4 ports (IEEE802.3at/af, 10/100Mbps)	8 ports (IEEE802.3at/af)	16 ports (IEEE802.3at/af)
Remote View	iOS (iPhone, iPad) / Android devices		
Internal HDD	1 x SATA port up to 10TB max, 10TB HDD Capacity		2 x SATA port up to 10TB max, 20TB HDD Capacity

Camera Model	VSIPP-6DIRG-I		
Product Image	WVP 0		
Image Sensor	1/2.7" 6.0MP Progressive Scan CMOS		
Lens	2.8mm Fixed Lens, Horizontal: 99°, Vertical: 53°		
Lighting Compensation	HLC / BLC / True WDR (120dB)		
Video Resolution	6.0MP (3072 x 1728) to CIF (352 x 288)		
Infrared Range	2 x Infrared LED, 50m range, Auto/manual on/off control		
Frame Rate	Main Stream: 6.0MP (1 ~ 20fps)/4.0MP(1 ~ 25fps) / Sub Stream: D1 (1 ~ 20fps) / Third Stream: 1080p (1 ~ 25fps)		
Smart Functions	Tripwire, Intrusion, Abandoned/Missing Object Detection, Face Detection, Motion Detection, Region of Interest, Smart Infrared		
Perimeter Protection	Tripwire & intrusion (Add recognition of humans & vehicles) / Intelligent search (Search tripwire/intrusion events by people or vehicle)		
Housing	Metal enclosure, IP67 weather-rated		
Power Supply	12VDC / PoE (802.3af) (Class 0)		

Your local Watchguard™ IP surveillance professional: